



Improved Features – USB5



Parallel opening of brake shoes



Enhanced corrosion protection




Optimized spring unit.



Upgraded manual release system



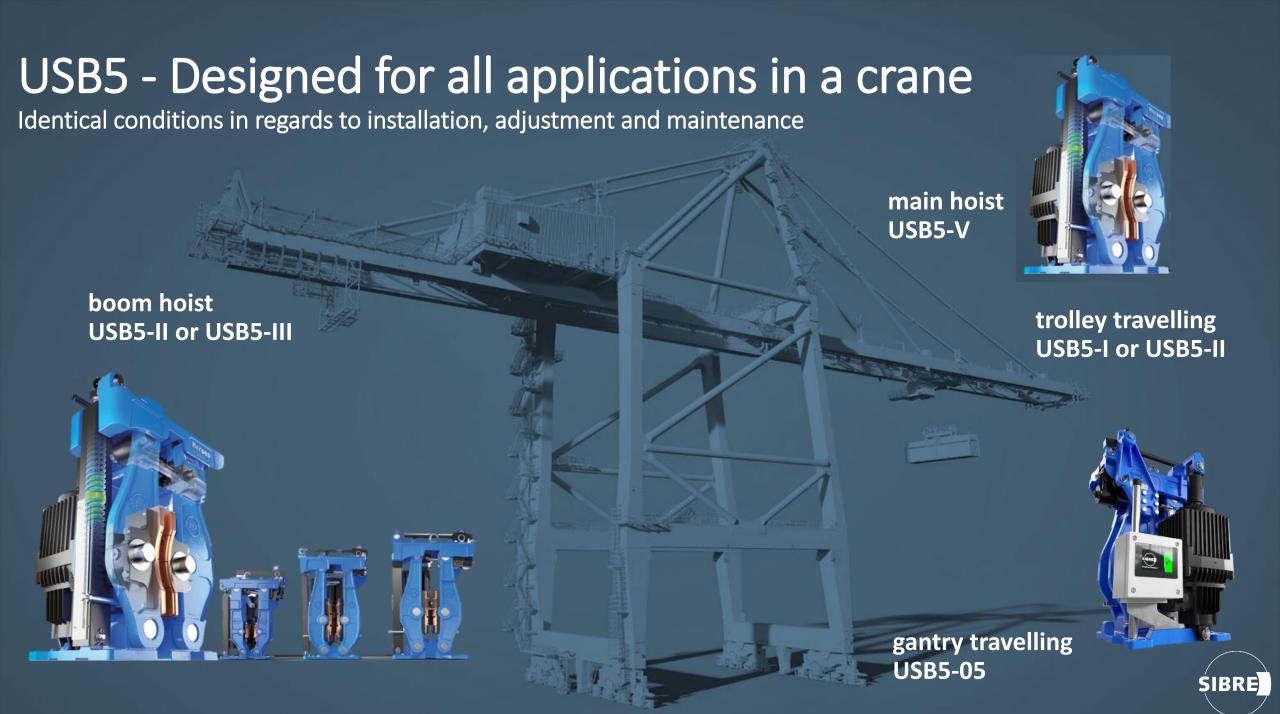

Standardized functional principle, available in 5 different sizes





brake torque: 100 - 690 Nm

centre height: 160 mm

weight: 46 kg



USB5-I

brake torque: 550 – 5.500 Nm

centre height: 230 mm

weight:

85 kg



USB5-II

brake torque: 1.300 - 9.800 Nm

centre height:

280 mm

weight: 175 kg



USB5-III

brake torque: 3.500 - 26.000 Nm

centre height:

370 mm

weight: 250 kg



USB5-V

Brake torque:

6.000 - 29.000 Nm

centre height:

280 mm weight:

weight: 285 kg



Equipment Monitoring and Control

SIBRE Status Monitoring (SSM)



Snag Load Protection (SLP)









References















KOCKS





